


PS45 Panel Mount Printer

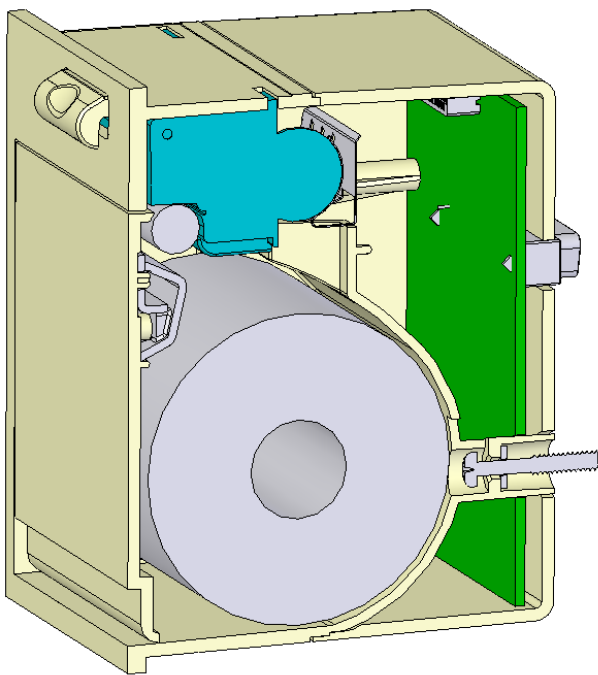

EASY INSTALLATION

The PS45 printer is installed from the outside of your product through a simple panel cut-out.

A single blind mate connector carries all power and I/O.

Two mounting screws, accessed with the door open, securely hold the printer in-place.

FLEXIBLE POWER

The PS45 needs +5VDC for logic. The printhead and motor accept +9 to +18 VDC. A regulated supply for the printhead is not needed, allowing direct connection to a battery. Ideal for automotive and portable devices.

STANDARD PAPER

The PS45 uses standard 50 mm wide paper.

MATERIAL

Bayer FR2000 (ABS+PC), UL94V0, ECO